




9	Terminal, SJT-compatible SZH-003T, pitch 1.5, tin-plated (A151TP-H)	2	PCS
8	Housing, JST-compatible ZHR-2P, Pitch 1.5, 2-pin, white, male (A1501H-2P)	2	PCS
7	Battery box lead: Red-Black paired wire	0.3	M
6	Label: 50×12×35, thickness: 0.03, 12×35 opaque whitebase, transparent PET adhesive tapewith PET release liner.	1	PCS
5	Heat shrink tube, ID 8.0mm, heavy-wall 600V, black	2	PCS
4	Heat shrink tube, ID 1.5mm, heavy-wall 600V, black	14	PCS
3	Plug + Housing: 1394 6P male, black insert, solder type, with grey quick-release shell	1	PCS
2	Plug: 10-pin DDK bayonet thread socket female, CM10-10S, straight, 3-position bayonet, silver	1	PCS
1	Cable: 3P×0.2mm ² + AB 10 million cycles super flexible data cable OD: 6.20mm green PVC	X	M
	Cable: 3P×0.2mm ² + AB 5 million cycles high flexible data cable OD: 6.20mm green PVC	X	M
	Cable: 3P×0.2mm ² + AB 2 million cycles flexible data cable OD: 6.20mm black PVC	X	M
NO.	DESCRIPTION	Q'TY UNIT	

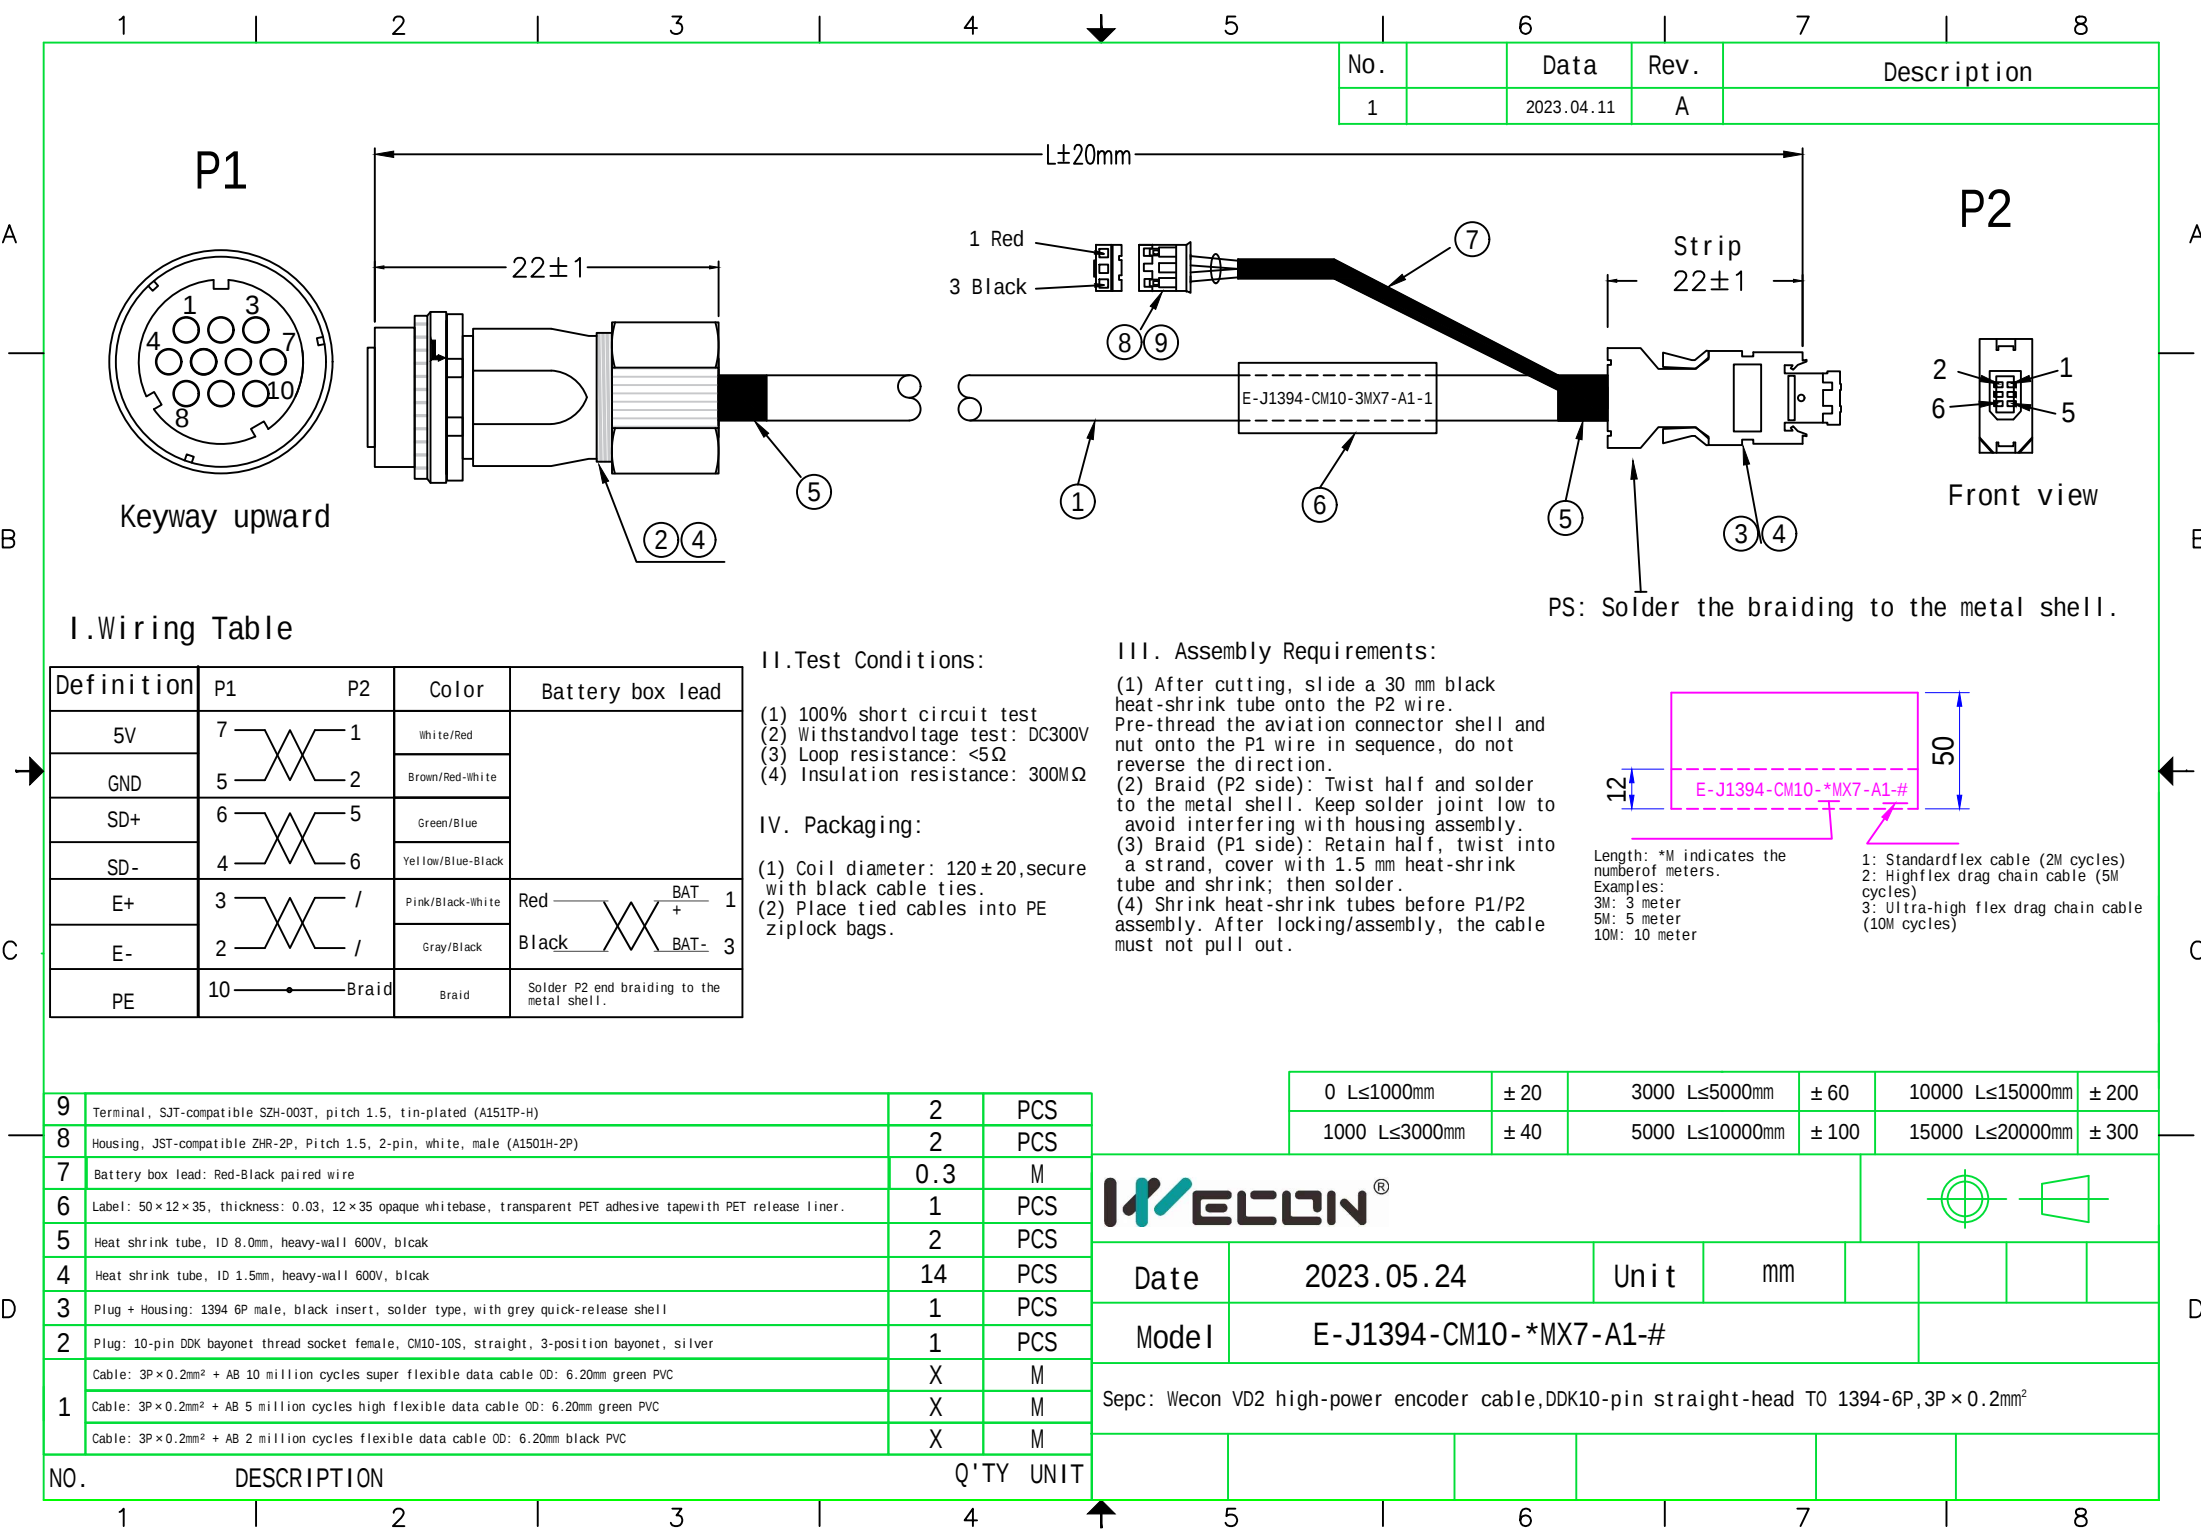

Date	2023.05.24	Unit	mm				
Model	E-J1394-CM10-*MX7-A1-#						
Spec: Wecon VD2 high-power encoder cable,DDK10-pin straight-head TO 1394-6P,3P×0.2mm ²							